

MS - H610M 666 WIFI6

Manual


VER:A0

SHANGKE GROUP

Edited on July 13, 2023

Editorial Department: Technical Department

Chapter I Configuration Diagram of Motherboard

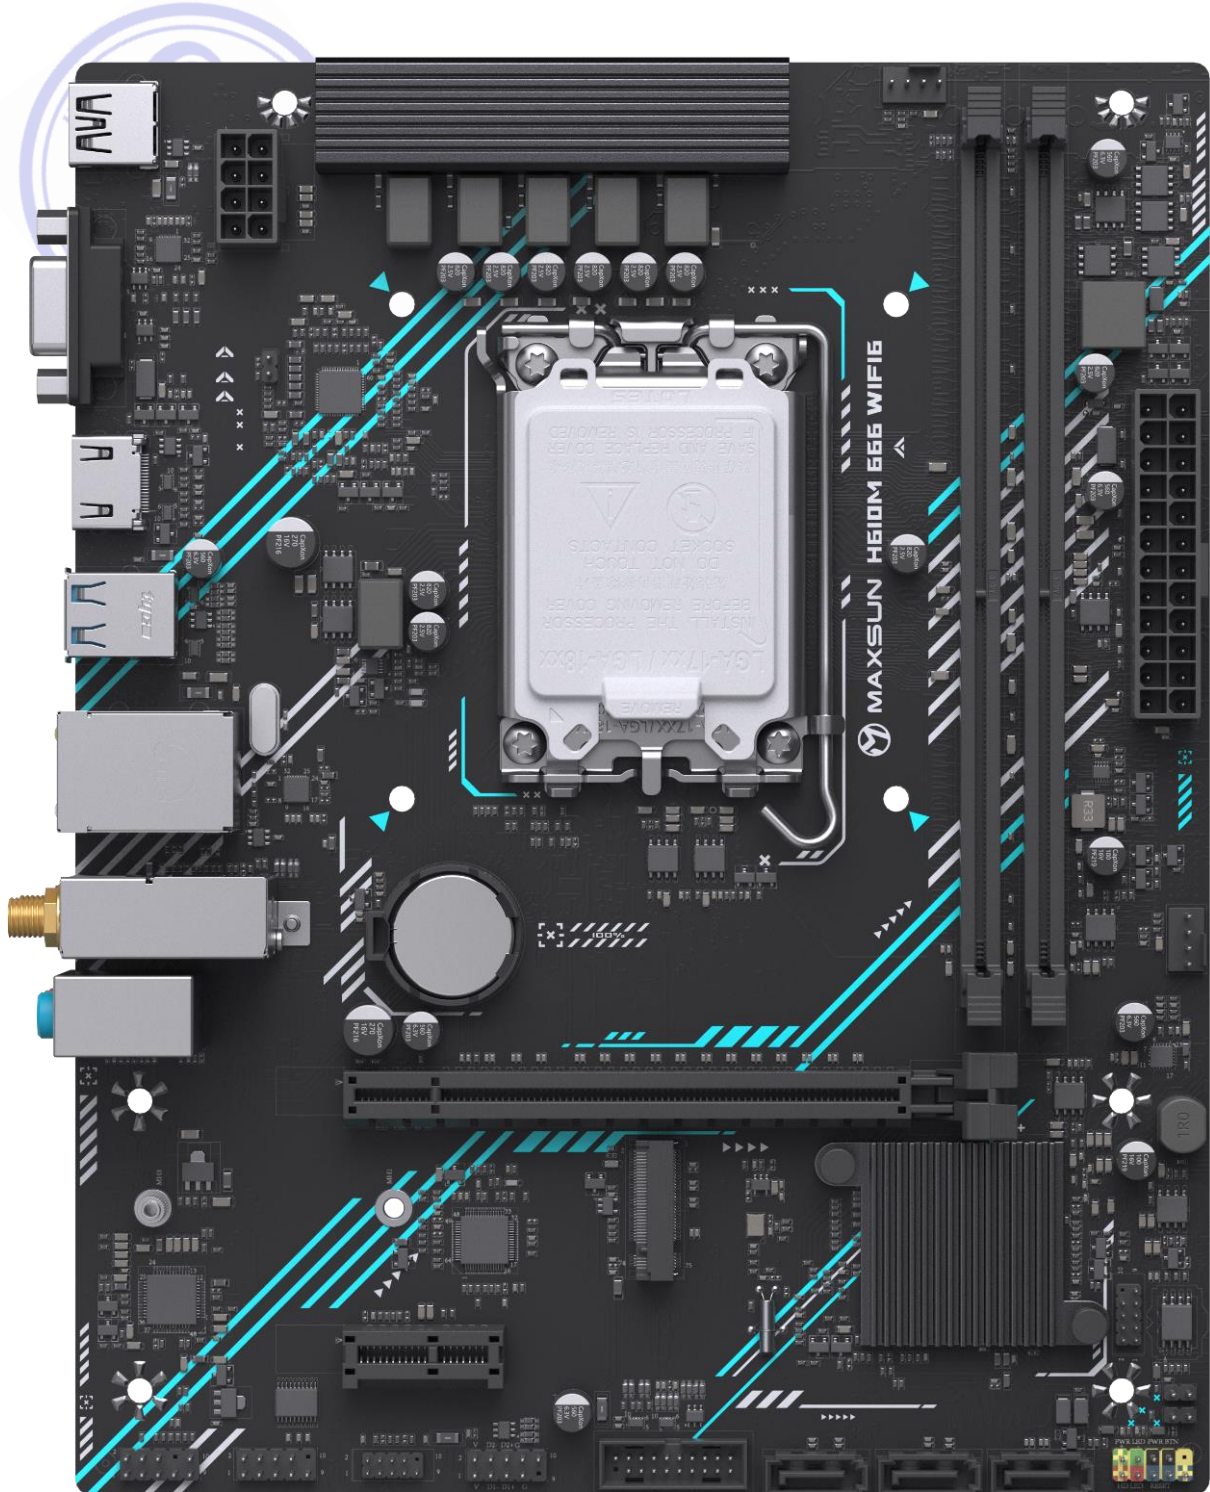


(This drawing is for reference only, and some details will be designed and adjusted according to the actual situation. Please refer to the material object, and our company reserves the right to interpret it.)

Chapter II Specifications

2.1 Motherboard hardware specifications

Motherboard size	Micro ATX(225*179mm)
CPU	Support LGA1700 slot 12th/13th generation processor (CPU overclocking technology is not supported) TDP: 55W
Chipset	Intel®H610 high-speed chipset
Memory	2x DIMM DDR4 memory slots Maximum support is 64GB. Support dual-channel memory technology Support 3200/2933/2666/2400/2133MHz.
Display	Based on the display function with integrated graphics processor, using shared display memory technology 1x HDMI 1.4 port, supports up to 4096x2160@30Hz resolution (supports HDCP 2.2) 1x VGA port, up to support 1920 * 1080 @ 60Hz resolution
Expansion port	1x PCIE X16 4.0 slot 1x PCIE X1 3.0 slot Support AMD and NVIDIA discrete graphics cards Supports PCIE resizable bar technology (requires simultaneous CPU and graphics card support)
Audio	Integrated REALTEK ALC897 audio chip Support front and rear channel output simultaneously (need to be set in HD Audio Controller) Rear audio port: 1x rear onboard LINE IN port, 1x rear onboard LINE OUT port and 1x rear onboard MIC_IN microphone port. F_AUDIO pin: 1x set of front microphone pin and 1x set of front audio output pin (these two pins are F_AUDIO pin groups).
Network	Integrated Realtek 8111H network card chip (10/100/1000Mbit) 1x onboard RJ45 port Support network wake-up Support PXE disk-less and UEFI disk-less boot. 1x onboard Intel® AX101 WIFI6 wireless, supports Bluetooth 5.2
Storage	1x M.2 X4 3.0 slot (supporting 2242/2280 PCIE X4/X2 channel SSD) 3x SATA3.0 ports
USB	On-board rear port: 2x USB3.2 GEN1 ports and 3x USB2.0 ports On-board pins: 1x set (2) of USB2.0 pins and 1x set (2) of USB3.2 GEN1 pins
In-board socket	1x 24-PIN motherboard ATX power supply port 1x 8-PIN motherboard ATX 12V power supply port with 12V input. 1x CLR_CMOS pin 1x sets of system fan pins and 1 set of CPU fan pins (supporting intelligent fan adjustment) 1x set of chassis front control panel pins (F_PANEL)

Hardware monitoring	Voltage monitoring Temperature monitoring Fan monitoring Intelligent fan speed control (the motherboard has been supported, and the intelligent fan speed control also needs fan support)
Operating system	Support UEFI Windows10 64bit, UEFI Windows11 64bit. Support Ubuntu 64bit
ESD protection	Air discharge $\pm 8KV$ Level C $\pm 6KV$ Class B Contact discharge $\pm 6KV$ Level C $\pm 3KV$ Class B *Test with the complete machine grounded well

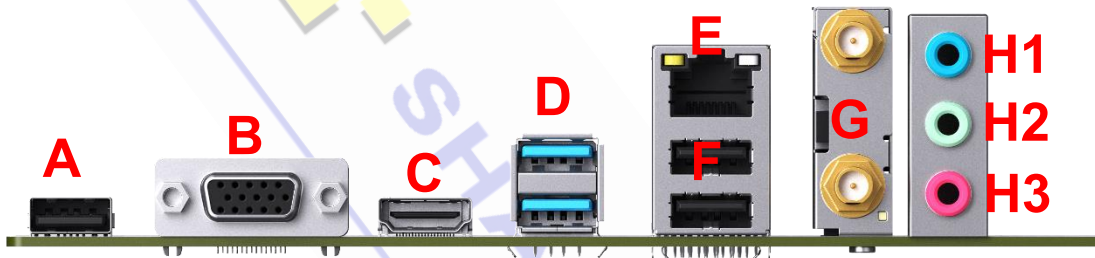

A: Single layer USB2.0 TYPE A connector

Supports up to USB 2.0 standard, backward compatible with USB 1.1 standard. For connecting USB TYPE A devices.

B: VGA port

Supports up to 1920x1080@60Hz resolution for connecting to a monitor.

C: HDMI port

Supports up to 4096x2160@30Hz resolution (HDMI2.0 version 2.0 and HDCP2.2), which is used to connect monitors.

D: double-layer USB3.2 GEN1 TYPE A port

The maximum support theory is 5Gb speed transmission, which can meet the backwards compatibility USB1.1 /2.0 standard and be used to connect USB TYPE A devices.

E: RJ45 port

Network cable port, which is used to access the network cable to link the host system to the network, with a maximum bandwidth of 1000Mbps.

Connection
bandwidth
indicator lights Running lights



Network socket

Connection bandwidth indicator	
bandwidth	Lamp state
Connection-less	put out
10Mbps	Green is always bright.
100Mbps	Green is always bright.
1000Mbps	Orange is always bright

Running indicator lamp	
No data transmission	put out
In data transmission	glimmer

F: double-layer USB2.0 TYPE A port

Up to support USB2.0 standard, but backwards compatibility USB1.1 standard. Used to connect USB TYPE A devices.

G: WIFI port

The WIFI port has an integrated INTEL wireless network and Bluetooth device inside, which requires the proper installation of the corresponding drivers for normal use.

H1: LINE IN port (blue)

Which is use for receiving audio input equipment, such as a mobile phone.

H2: line out port (light green)

Used to access audio output devices, such as headphones, speakers and other external devices.

H3: audio-microphone connector (pink)

Used to access audio input devices, such as microphones and other radio equipment.



MS-H610M 666 WIFI6

使用手册


VER:A0

SHANGKE GROUP

编辑时间：2023 年 07 月 13 日

编辑部门：商科集团技术部

第一章 主板配置图

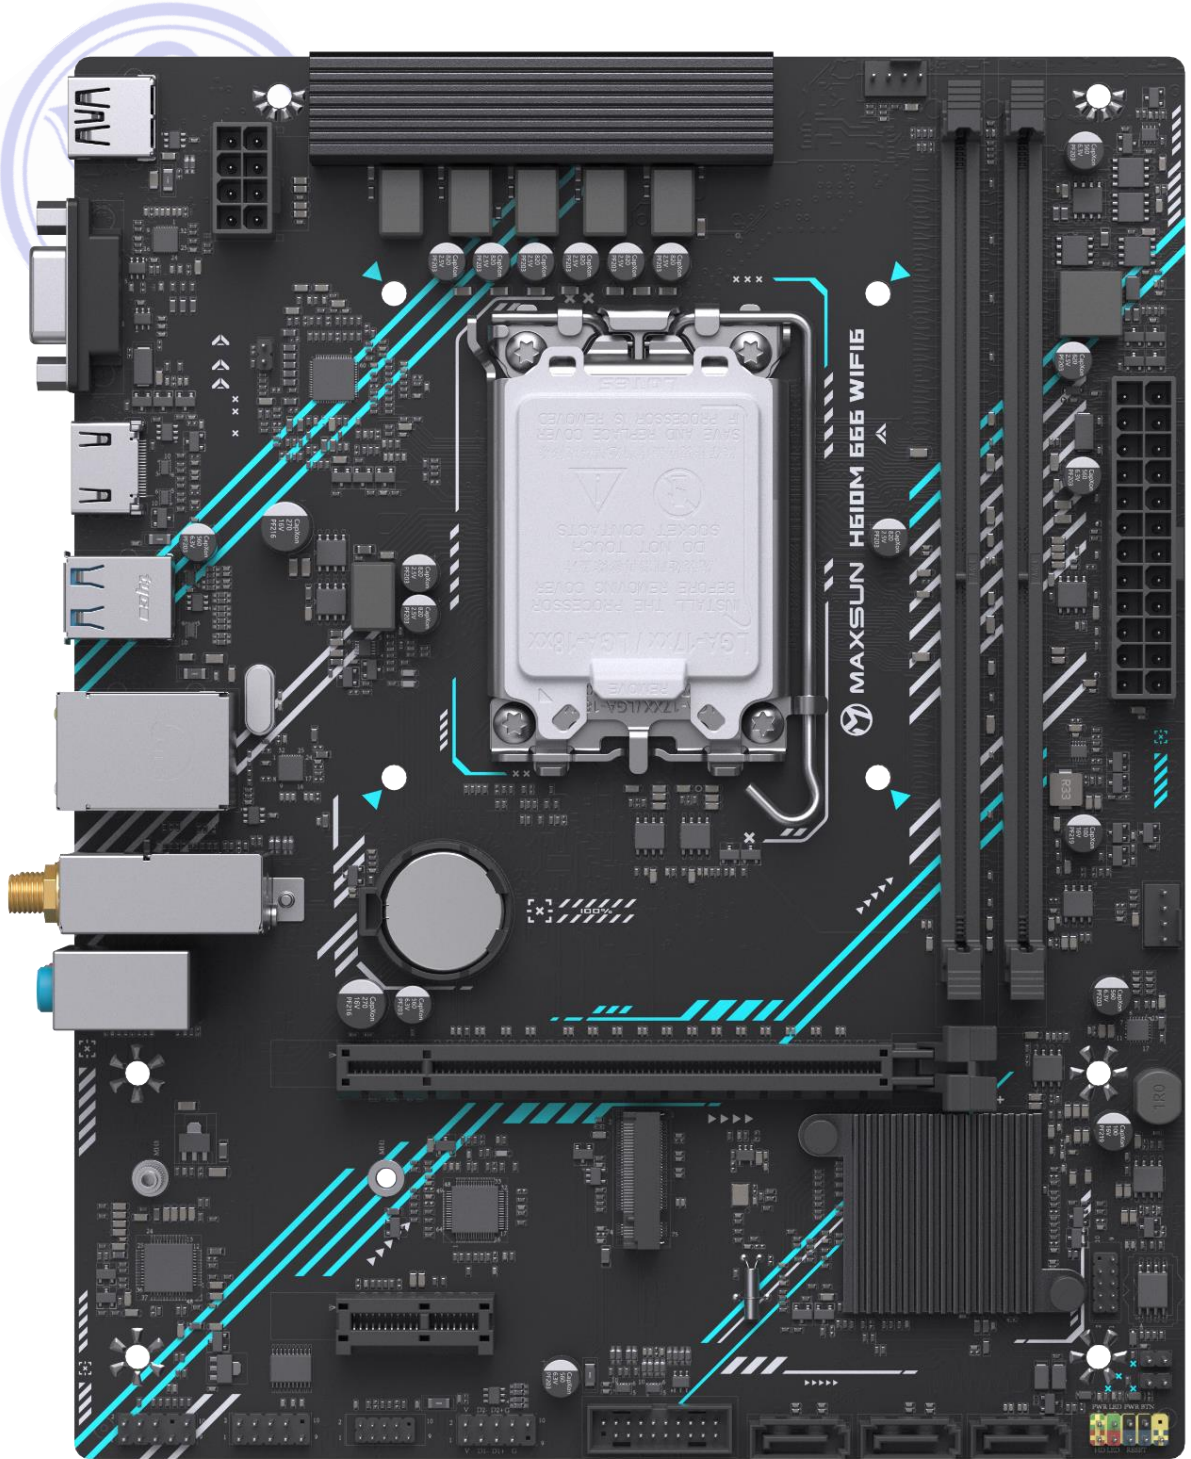


(此图仅供参考，部分细节会根据实际情况设计调整，请以实物为准，我司保留解释权)

第二章 规格

2.1、主板硬件规格

主板尺寸	MicroATX(225*179mm)
CPU	支持 LGA1700 插槽 第 12 代处理器 TDP: 55W
芯片组	Intel®H610 高速芯片组
内存	2 个 DIMM DDR4 内存槽 最高支持共 64GB 支持双通道内存技术 支持 3200/2933/2666/2400/2133MHz 内存频率
显示	基于具备集成显卡处理器的显示功能, 采用共享显示内存技术 1 个 HDMI1.4 接口, 最高支持 4096x2160@30Hz 分辨率 (支持 HDCP2.2) 1 个 VGA 接口, 最高支持 1920*1080@60Hz 分辨率
扩展接口	1 个 PCIEX16 4.0 插槽 1 个 PCIEX1 3.0 插槽 支持 AMD 和 NVidia 独立显卡 支持 PCIe resizable bar 技术 (需 CPU 和显卡同步支持)
音频	集成 REALTEK ALC897 声卡芯片 支持前后声道同时输出 (需要高清音频控制器中设置) 后置音频接口: 1 个后置板载 LINE IN 接口, 1 个后置板载 LINE OUT 接口, 一个后置板载 MIC_IN 麦克风接口。 F_AUDIO 插针: 1 组前置麦克风插针, 1 组前置音频输出插针 (此 2 个插针为 F_Audio 插针组)
网络	集成 REALTEK8111H 网卡芯片(10/100/1000Mbit) 1 个板载 RJ45 接口 支持网络唤醒 支持 PXE 无盘、UEFI 无盘引导 1 个板载 Intel®AX101 WIFI6 无线网卡,支持蓝牙 5.2
存储	1 个 M.2 插槽 (仅支持 2242/2280 PCIe X4/X2 3.0 通道 SSD) 3 个 SATA3.0 接口
USB	板载后置接口: 2 个 USB3.2 GEN1 接口, 3 个 USB2.0 接口 板内插针: 1 组 (2 个) USB2.0 插针, 1 组 (2 个) USB3.2 GEN1 插针
板内插座	1 个 24PIN 主板 ATX 供电接口 1 个 8PIN 主板 ATX 12V 供电接口, 12V 输入 1 组系统风扇插针、1 组 CPU 风扇插针 1 组机箱前置控制面板插针 (F_PANEL)
硬件监控	电压监测 温度监测 风扇监测 智能风扇控速 (主板已作支持, 智能风扇控速也需风扇支持)

操作系统	支持 Windows10 64bit, Windows11 64bit 支持 Ubuntu 64bit
ESD 防护	空气放电 ±8KV C 级 ±6KV B 级 接触放电 ±6KV C 级 ±3KV B 级 *整机接地良好的情况下测试

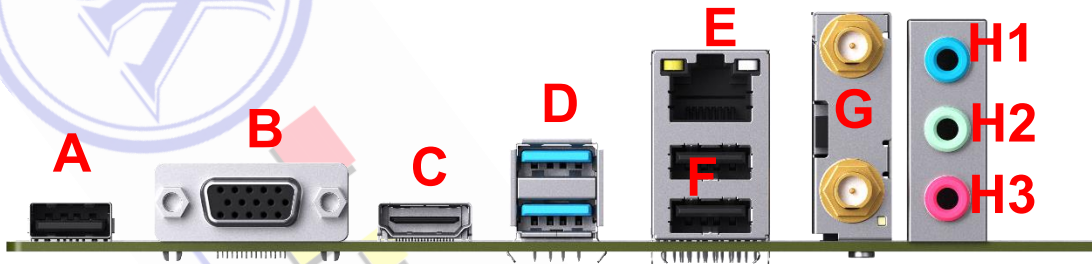

A: 单层 USB2.0 TYPE A 接口

最高支持 USB2.0 标准, 可向下兼容 USB1.1 标准。用于连接 USB TYPE A 设备。

B:VGA 接口

最高支持 1920x1080@60Hz 分辨率, 用于连接显示器。

C: HDMI 接口


HDMI1.4 接口, 最高支持 4096x2160@30Hz 分辨率 (支持 HDCP2.2), 用于连接 HDMI 显示器接口。

D: 双层 USB3.2 GEN1 接口

最高支持理论 5Gb 速度传输, 可向下兼容 USB1.1、USB2.0 标准,用于连接 USB TYPE A 设备。

E: RJ45 接口

网线接口, 用于接入网线将主机系统连接到网络, 最高带宽 1000Mbps。



连接带宽指示灯	
带宽	灯状态
无连接	灭
10Mbps	绿色常亮
100Mbps	绿色常亮
1000Mbps	橙色常亮

运行指示灯	
无数据传输	灭
数据传输中	闪烁

F: 双层 USB2.0 TYPE A 接口

最高支持 USB2.0 标准, 可向下兼容 USB1.1 标准。用于连接 USB TYPE A 设备。

G: WIFI 接口

WIFI 接口内部集成了 INTEL 无线网卡和蓝牙设备, 需要正确安装相应的驱动程序才能正常使用。

H1: Audio-in 接口(蓝色)


用于接收音频输入设备，如手机音频输入。

H2: Audio-out 接口（浅绿色）

用于接入音频输出设备，如耳机、音箱等外放设备。

H3: Audio-麦克风接口（粉红色）

用于接入音频输入设备，如麦克风等收音设备。

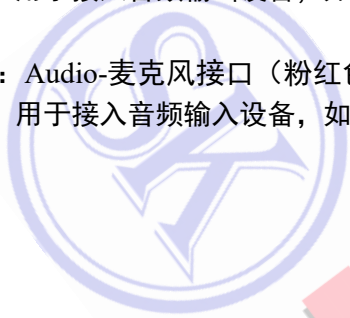

SHANGKE GROUP