

ViewSonic® PROJECTOR PS502X


Key Features

- 4,000 ANSI Lumens offering clear images in any environment
- 0.616 Short throw ratio for minimal space consumption
- Up to 300" ultra large screen with lower cost-per-inch
- Easy and flexible connection: dual HDMI ports, USB Type-A port
- Convenient software updates for projectors via USB connection



Product Description

The PS502X is ViewSonic's high brightness XGA short throw business/education projector. Boasting 4,000 ANSILumens of high brightness, the projector offers clear images of up-to-300" large screen in meeting rooms, classrooms, or any other bright environment. With 0.616 short throw ratio, the projector can provide 100" large screen size from only 1.3m away without being obstructed by shadows, allowing for a large screen even in small spaces. The dual HDMI ports allow you to flexibly connect to multiple devices, easily switching between content sources. The USB Type-A port can supply power to HDMI wireless dongles, making wireless content streaming more convenient. The projector also allows software updates via USB cable connection with simply your laptops, skipping trips to service centers.

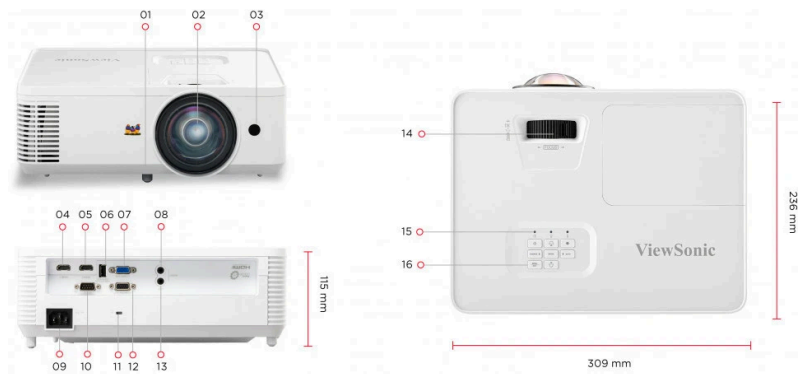

- | | | | | |
|--------------------|---------------------------|---------------------|-------------------|------------|
| 1. Adjustment Foot | 5. HDMI 2 | 8. Audio In | 12. Monitor Out | 16. Keypad |
| 2. Lens | 6. USB-A(5V/15A, Service) | 9. AC in | 13. Audio Out | |
| 3. Front IR | 7. Computer In | 10. R232 | 14. Focus Ring | |
| 4. HDMI 1 | | 11. Kensington Lock | 15. LED Indicator | |

Visit Us www.viewsonic.com



SPECIFICATION		OTHERS	
Native Resolution:	1024x768	Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Brightness:	4000 (ANSI Lumens)	Power Consumption:	Normal: 295W Standby: <0.5W
Contrast Ratio with SuperEco Mode:	15000:1	Operating Temperature:	0~40°C
Display Color:	1.07 Billion Colors	Carton:	Brown
Light Source Type:	240W UHP Lamp	Net Weight:	2.87kg
Light Source Life (hours) with Normal Mode:	4000	Gross Weight:	4.08Kg
Light Source Life (hours) with SuperEco Mode:	12000	Dimensions (WxDxH) with Adjustment Foot:	309x234x115mm
Lens:	F=2.7, f=7.15mm	Packing Dimensions:	400x337x168mm
Projection Offset:	130%+/-10%	OSD Language:	English, German, French, Swedish, Spanish, Portuguese, Polish, Finnish, Korean, Russian, Hungarian, Czech, Arabic, Thai, Turkish, Italian, Total 22 languages
Throw Ratio:	0.616	User Guide Language:	English, S-Chinese, T-Chinese, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Total 15 languages
Optical Zoom:	Fixed	STANDARD ACCESSORY	
Digital Zoom:	0.8x-2.0x	Power Cord:	1
Image Size:	60"-300"	VGA Cable:	1
Throw Distance:	0.75m-3.76m (77"@0.96m)	Remote Control:	1
Keystone:	+19°/-19° (V)	QSG:	Yes
Audible Noise (Normal):	34dB	Lens Cover:	Yes
Audible Noise (Eco):	25dB	Air Filter:	Yes (CN Only)
Input Lag:	33.2ms	Warranty Card:	Yes (CN Only)
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)	OPTIONAL ACCESSORY	
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	Lamp/Light Source:	RLC-128
Horizontal Frequency:	15K-102KHz	Air Filter:	RSPL
Vertical Scan Rate:	23-120Hz	Wall/Ceiling Mount:	PJ-WMK-305 PJ-WMK-007
INPUT		Carry Bag:	PJ-CASE-008
Computer in (share with component):	1		
HDMI:	2 (HDMI 1.4/ HDCP 1.4)		
Audio-in (3.5mm):	1		
OUTPUT			
Monitor out:	1		
Audio-out (3.5mm):	1		
Speaker:	16W		
USB Type A (Power):	1 (5V/1.5A)		
CONTROL			
RS232 (DB 9-pin male):	1		
USB Type A (Services):	1 (share with USB A Output)		

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.

